




Flow Control

Tyco Water

Features

- Manufactured from EPDM rubber providing improved performance over traditional rubber.
- Incorporates specially designed lip seal to ensure leak free operation even at low pipeline pressures.
- Compatible with Series 1 mPVC, uPVC and oPVC pipes.
- Outer face painted white for simple identification.

PLASTYT® gaskets are manufactured to AS1646.

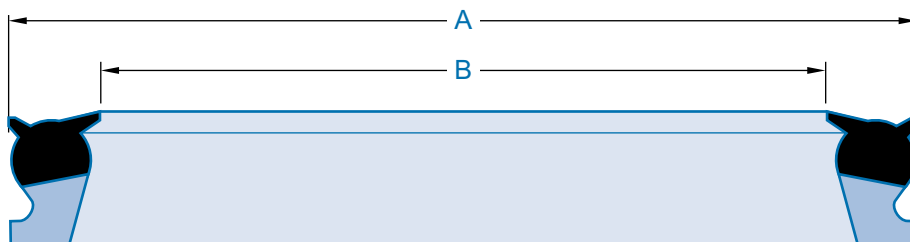

Dimensions

Nominal Size DN	Dimensions		Suits Pipe OD	Maximum Deflection
	A	B		
100	145	106	114	3.5°
150	200	148	160	3.5°
200	258	215	225	3.5°
225	285	240	250	3.5°
250	311	271	286	3.5°
300	371	329	345	2.5°
375	463	409	426	2.5°
450	544	488	507	2.5°

NB - All dimensions quoted are in mm and are approximations only.



General Application

PLASTYT gaskets are utilized in TYTON JOINT® fittings and valves to accommodate Series 1 PVC.

Technical Data

Size Range: DN100 - DN450
Allowable Operating Pressure: 1600 kPa
Maximum Temperature: 80°C
Standards: AS1646 - Elastomeric Seals for Waterworks Purposes
Certification: StandardsMark Licence No. 2258 Certified to AS 4020 - Suitable for contact with drinking water.